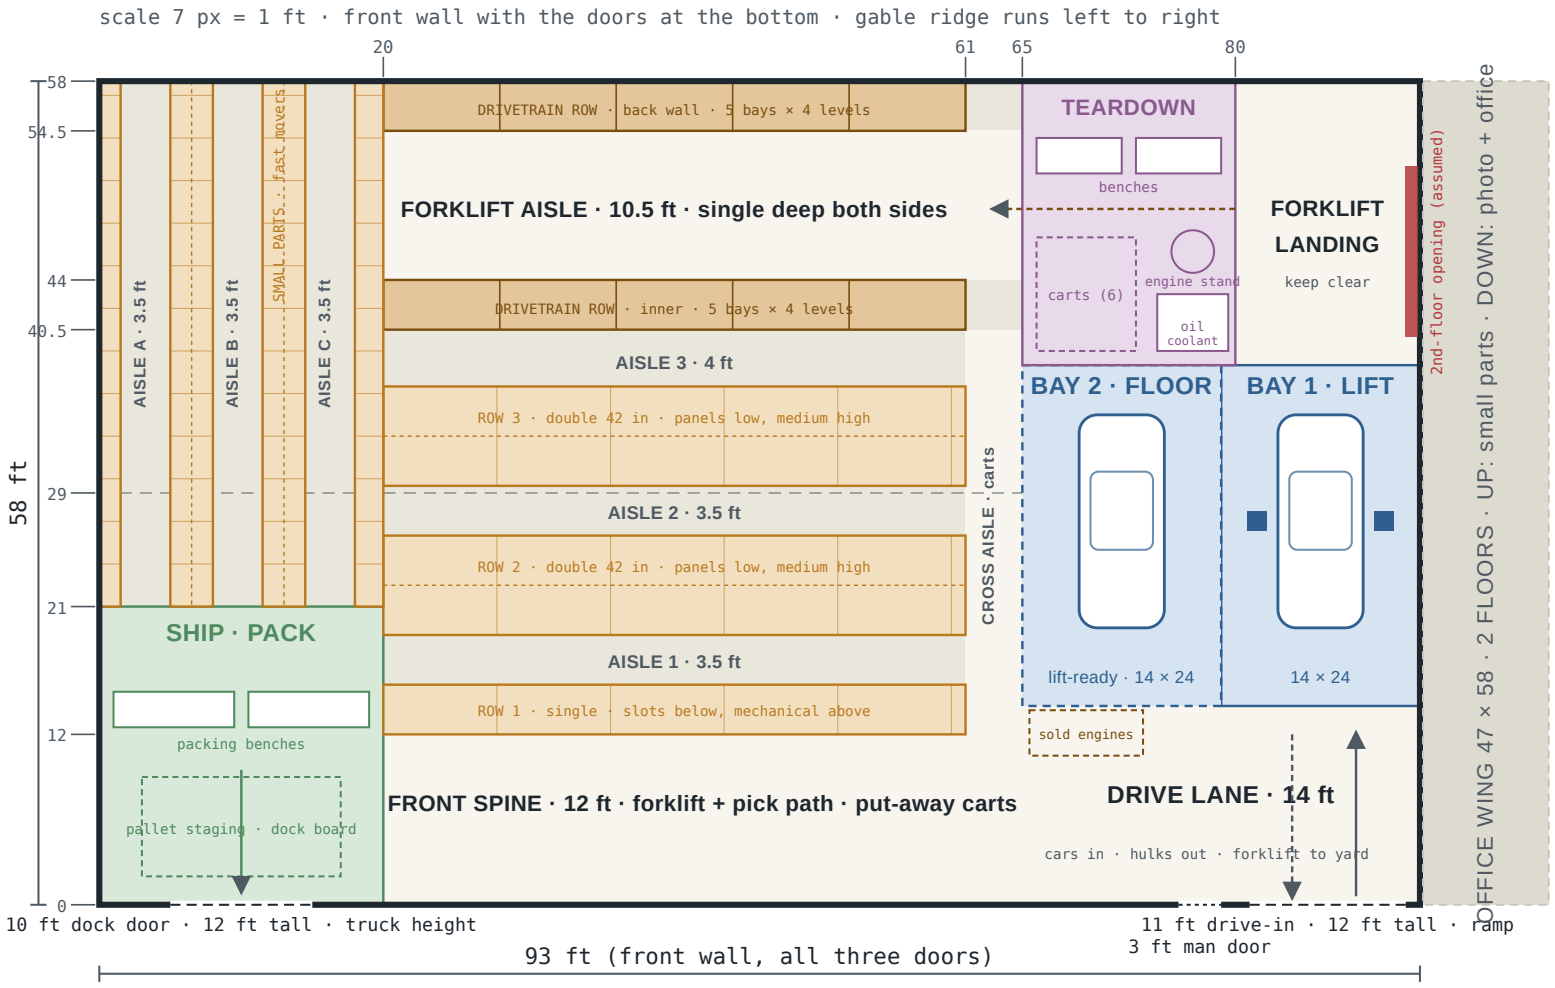
Warehouse Plan C

Last updated Oct 9, 2026, 12:08 PM ET · plan C (gable roof, forklift drivetrain row, office wing storage)

93 × 58 ft	**80**	**205 ft**	**222 ft**	**~700 ft**
MAIN ROOM · RIDGE 21 FT DOWN THE MIDDLE	DRIVETRAIN PALLETS, SINGLE DEEP	DEEP RACK FACE, PANELS + MECHANICAL	SMALL-PARTS FACE IN MAIN ROOM	SMALL-PARTS FACE IN OFFICE WING


scale 7 px = 1 ft · front wall with the doors at the bottom · gable ridge runs left to right
20
61
65
80
58
54.5
44
40.5
29
21
12
0
58 ft
AISLE A · 3.5 ft
AISLE B · 3.5 ft
SMALL PARTS · fast movers
AISLE C · 3.5 ft
DRIVETRAIN ROW · back wall · 5 bays × 4 levels
FORKLIFT AISLE · 10.5 ft · single deep both sides
DRIVETRAIN ROW · inner · 5 bays × 4 levels
AISLE 3 · 4 ft
ROW 3 · double 42 in · panels low, medium high
AISLE 2 · 3.5 ft
ROW 2 · double 42 in · panels low, medium high
AISLE 1 · 3.5 ft
ROW 1 · single · slots below, mechanical above
CROSS AISLE · carts
TEARDOWN
benches
carts (6)
engine stand
oil coolant
FORKLIFT LANDING
keep clear
2nd-floor opening (assumed)
BAY 2 · FLOOR
BAY 1 · LIFT
lift-ready · 14 × 24
14 × 24
sold engines
SHIP · PACK
packing benches
pallet staging · dock board
FRONT SPINE · 12 ft · forklift + pick path · put-away carts
DRIVE LANE · 14 ft
cars in · hulks out · forklift to yard
OFFICE WING 47 × 58 · 2 FLOORS · UP: small parts · DOWN: photo + office
10 ft dock door · 12 ft tall · truck height
11 ft drive-in · 12 ft tall · ramp
3 ft man door
93 ft (front wall, all three doors)

Drivetrain rack. Two single-deep rows on a 10.5 ft forklift aisle at the back wall. 10 bays × 2 pallets × 4 levels. Every engine reachable from the aisle, nothing behind anything.

Deep hand-pick rack, your 42 in pallet rack, rows running with the ridge so every row gets full height. Wood slot base for doors and hoods, 18 in beams above for mechanical. 3.5 to 4 ft aisles, ladders.

Small-parts shelving, 18 in doubles at 3.5 ft aisles, behind shipping. Fast movers only. The rest of the small parts go upstairs in the office wing by forklift.


Bays 14 × 24 ft. Bay 1 lift, bay 2 floor bay, lift-ready.


Teardown + forklift landing. Benches and carts on the back wall. Clear floor in front of the second-floor opening so the forklift can lift pallets up.

Shipping at the dock door with a dock board. **Outbound drivetrain** stages by the ramp door, 2 pallets.

Forklift paths. Drive lane, 12 ft front spine, back drivetrain aisle, landing. The forklift never enters a hand-pick aisle.

EYE-LEVEL VIEWS

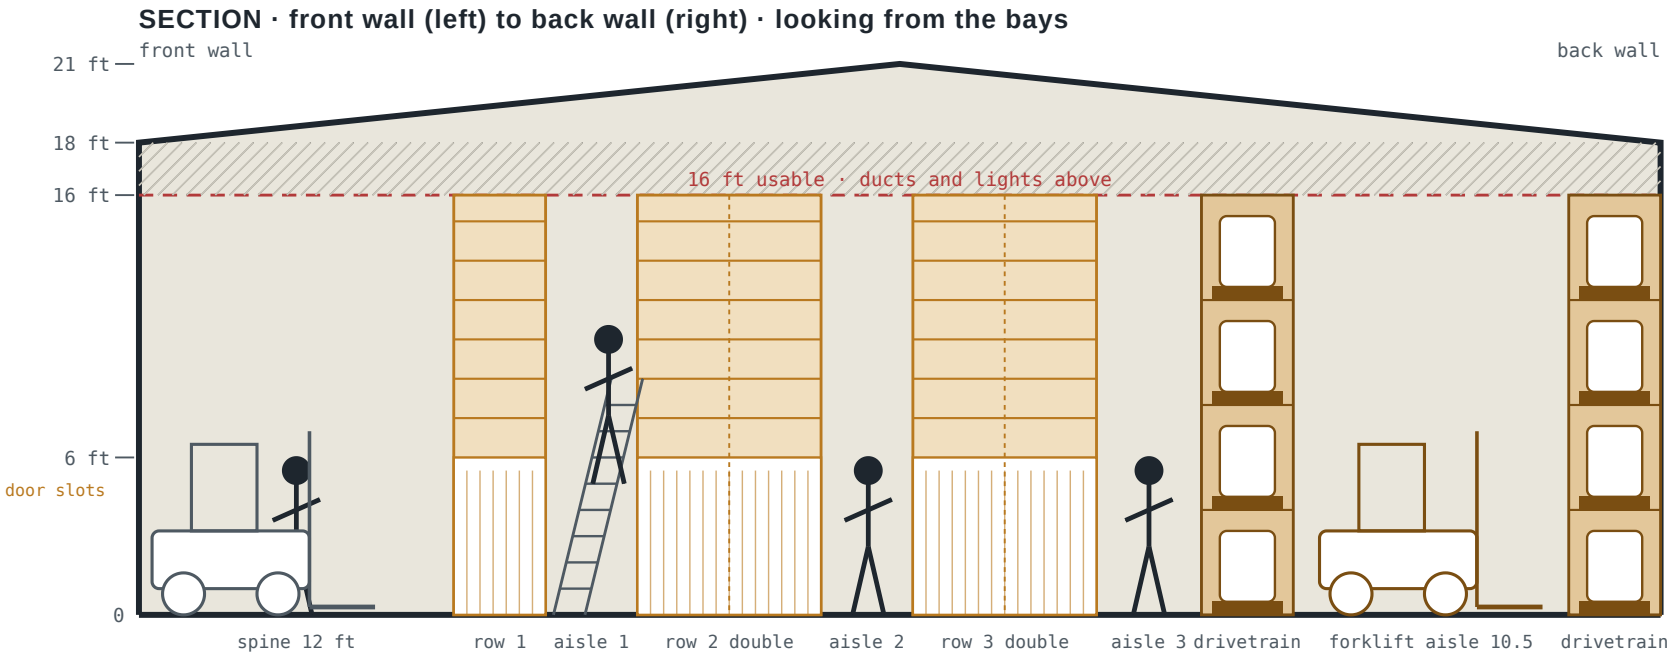

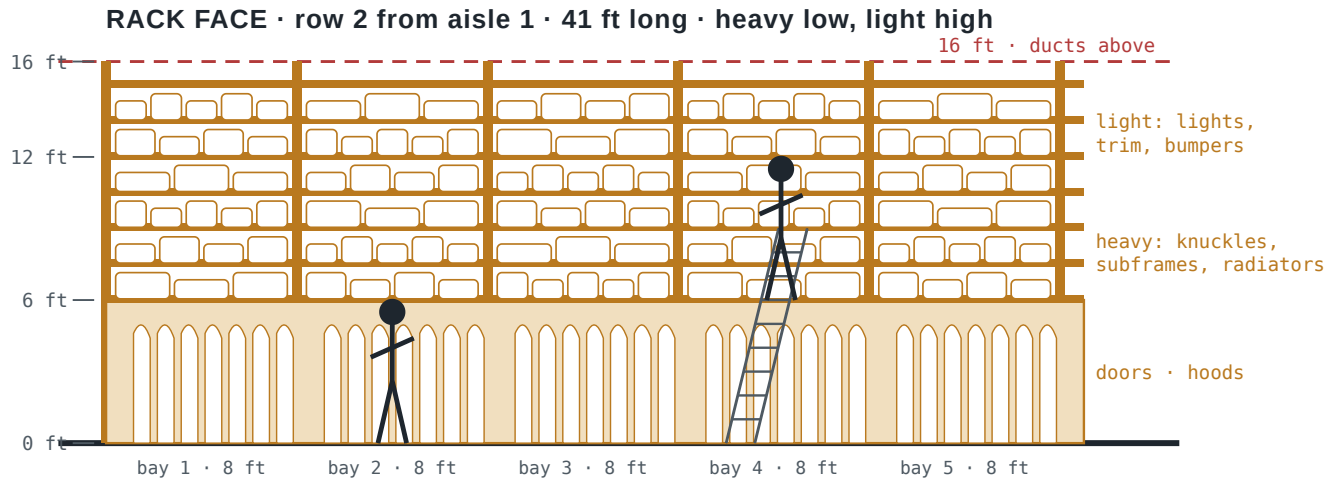

Top: standing in the cross aisle by the bays, looking left along the rows. Front wall on the left, back wall on the right. Bottom: standing in aisle 1, looking at the face of row 2. Usable height 16 ft, ducts and lights above that.

FLOW

```
car in (ramp) → bay 2 strip → bay 1 lift → hulk out (ramp)
engines/trans → forklift → back row, same day, single deep → sold → staging at ramp → freight
parts → teardown carts → photos (office wing) → put-away: heavy low in deep rack · light high · small upstairs
```

Where the 17,000 items go. Main room: 80 drivetrain pallets, about 200 panels in slot bases, most medium parts on 205 ft of deep face, and about 4,500 fast small parts on 222 ft of shelving. Office wing: about 9,000 small parts plus light medium parts (lights, mirrors, trim) on roughly 700 ft of shelving, lifted up by forklift. Outside: wheels, slow panels, and drivetrain overflow in two to three containers along the left fence line, with the right brush cleared later for a metal building.

ZONES

1. **Drive lane, 28 × 14 ft** at the ramp door. Cars in, hulks out, forklift to the yard. Outbound drivetrain pallets stage in the left corner of the lane.
2. **Bay 1 lift and bay 2 floor bay,** 14 × 24 ft each, straight in from the door.
3. **Forklift landing, 13 × 20 ft** on the right wall behind the bays, in front of the second-floor opening. Assumed opening location, see assumptions.
4. **Teardown, 15 × 20 ft** next to it: two benches, six carts, engine stand, oil and coolant in the corner.
5. **Back drivetrain aisle, 45 × 10.5 ft,** forklift only, entered from the landing. Rack both sides, 4 levels at the 18 ft wall.
6. **Middle deep-rack block, 41 × 28.5 ft:** one single and two double rows running left to right under the ridge, 5 faces × 41 ft. Bottom 6 ft slots for doors and hoods, beams every 18 in above for mechanical and medium. Cross aisle at the bay wall end for carts.
7. **Front spine, 45 × 12 ft,** forklift and pick path. Put-away carts park here.
8. **Small-parts block, 20 × 37 ft** behind shipping: 6 faces × 37 ft, aisles open into packing.
9. **Shipping and packing, 20 × 21 ft** at the dock door.
10. **Office wing, upstairs:** boxed small parts and light medium parts on 18 in shelving. Pallets go up by forklift. **Downstairs:** photo station, listing desks, office.

AREA BUDGET

Zone	Sq ft	Share
Deep-rack block (racks + aisles)	1,169	22%
Drivetrain rows + forklift aisle	788	15%
Small-parts block	740	14%
Bays 1 and 2	672	12%
Front spine	540	10%
Teardown + landing	560	10%
Shipping and packing	420	8%
Drive lane	392	7%
Cross aisle	113	2%
Total	**5,394**	**100%**

Drivetrain: 10 bays × 2 pallets × 4 levels = 80 single-deep pallets, against 49 engines + 65 transmissions today. Diffs, transfer cases and subframes go on the bottom level of the deep rack or outside.

HOW C DIFFERS FROM A AND B

1. Rows run left to right with the ridge, so every rack gets 18 to 21 ft instead of hitting the low wall at one end.
2. Drivetrain gets a real single-deep rack on its own forklift aisle, the two-deep problem gone.
3. Forklift inside is used for exactly three jobs: drivetrain row, second-floor opening, ramp. All other picking is by hand like today.
4. Small parts mostly leave the main room for the office wing, which frees the floor for the heavy classes that cannot go upstairs.
5. Shelf-face total is about 1,130 ft (205 deep + 222 small + ~700 office) against about 940 ft today, so 17k fits indoors with the office wing in play.

UPGRADES THAT FIT LATER

1. Second lift in bay 2. Anchors and 220 V run on day one.
2. Mezzanine over the deep-rack block at 9 ft, using the 21 ft ridge. Doubles the hand-pick face in the same footprint.
3. Containers along the left fence after clearing the tree strip. Two to three 40 ft high-cubes for wheels, slow panels, drivetrain overflow.
4. Metal storage building on the right side after clearing the brush. Replaces the containers.

ASSUMPTIONS

1. Second-floor opening is on the right wall, about 40 to 52 ft back from the front wall. If it is elsewhere, the landing and teardown swap places or move.
2. Office wing upstairs floor takes shelving loads. Confirm before loading.
3. Door positions on the 93 ft wall as sketched. Slab 4 in or better under the lift.
4. Counterbalance forklift, 10.5 ft aisle. A 3-wheel electric fits in 9 ft and would widen the deep-rack block by 1.5 ft.

EQUIPMENT

1. Reuse both lifts (one now), all pallet rack, all wire shelving, benches, carts, ladders.
2. One forklift inside, 4,000 to 5,000 lb. The second stays outside or is sold.
3. Drivetrain rack: 10 bays, 42 in deep, 16 ft uprights, 4 beam levels rated for engines on pallets.
4. Dock board at the 10 ft door. Drain cart, waste oil tank, coolant tank, battery and airbag cabinets, compressor with drops at both bays.
5. Pallet jack and engine hoist at the bays.